

EVOLUTION D5 ENCLOSURE INSTRUCTIONS

Kit Includes:

- 2 – Short Rails (*If requested*)
- 2 – Long Rails (*If requested*)
- 2 – Long Side Panels
- 2 – Covers for Front Struts
- 1 – Valence for Front
- 1 – Vinyl Panel for Rear

Hardware

Tools Needed:

- Phillips Screw Driver/Drill
- 10mm Size Wrench

INSTRUCTIONS


1. *If rails are already installed on cart. Move to the next step – Install side, front, & rear rails. Install with the rounded edge facing the outside of the cart. Short rails in front & rear, long rails on sides.*

Note: For rear, taking off sound bar can be beneficial if view is blocked. Use Phillips screw driver to do so.

2. Starting in the front of the cart. Loosen windshield screws.



3. Install 2 covers for front struts. Feed vinyl between strut and windshield. Scrunch Velcro strips together. *(Note: Line up cover before trying to install to verify holes match correctly.)*

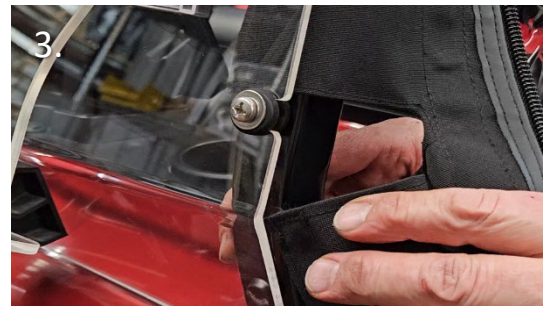

4. Tighten windshield.

5. Feed front valence into place.



6. Feed long side panels into rail making sure that the valence piece is on the outside of the cart.



7. Feed the back panel into the rear rail. Again, making sure the valence is on the outside of the cart.



8. Once all enclosure panels are installed, tuck the front and rear 'leftover' strips into the longer side panels.



9. Complete your installation by securing all Velcro pieces, and zipping or rolling your enclosure up.

